




---

# HUB

---

## COMPUTER WORKSTATION

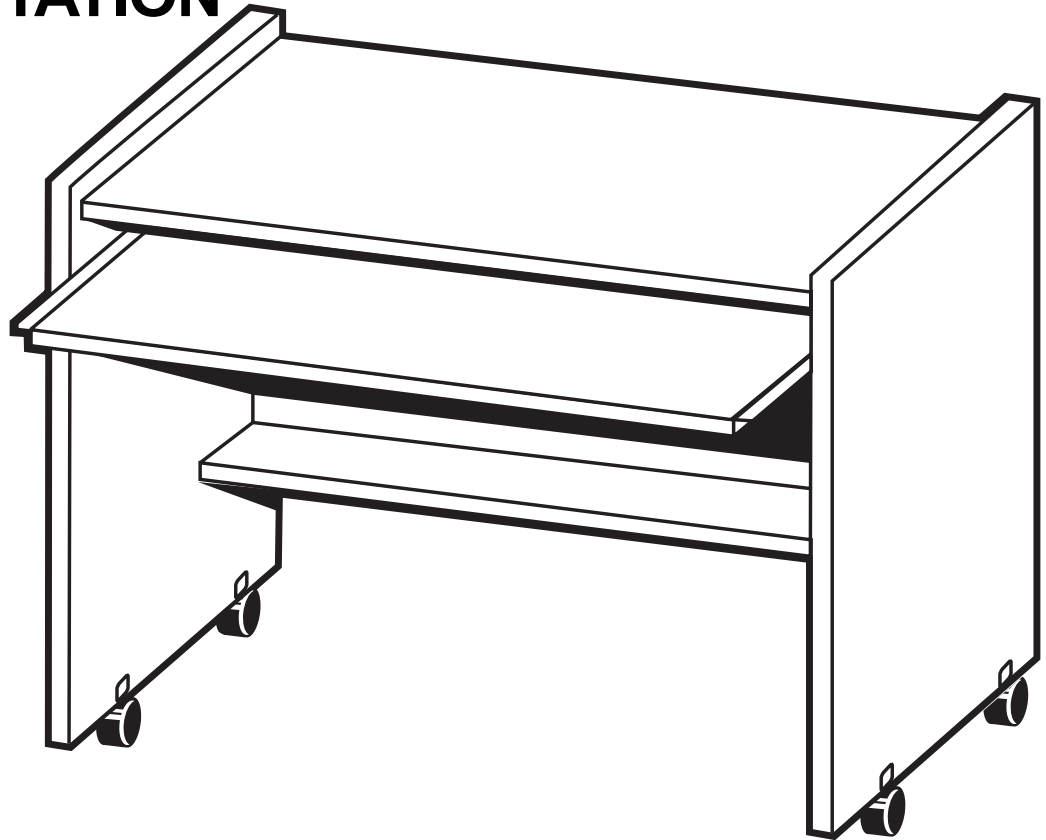

### IMPORTANT!

Assembly may require the assistance of another person.

Before you begin assembly:

**READ THE DIRECTIONS** all the way through one time. This will speed up the process and help you understand the sequence of steps.

**COUNT THE PARTS AND HARDWARE** before assembly. This ensures you have received all necessary parts before you begin.


**TOOLS:** You may need a Phillips head screwdriver, a medium slotted screwdriver or a plastic mallet. To protect your new furniture from damage during assembly, it is recommended to work on a carpeted surface.

In the event any parts are missing from this package, send your name, address, telephone number, and a description of the missing part(s) to: PARTS, Box 1420, Missoula, MT 59806 or call: 1-800-769-5693 or FAX 1-800-445-5281.


**CAUTION:** On assemblies requiring glue, make sure the unit is assembled correctly before gluing. Once this unit is assembled with glue, the manufacturer will not be responsible for damaged parts. Keep a damp cloth or sponge handy to wipe off excess glue.

To care for this furniture, simply wipe with a cloth dampened with glass cleaner containing ammonia-D.


## PARTS DIAGRAM

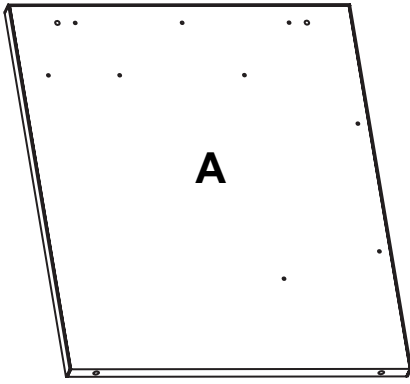


Left Side	05840741	1 ea.
-----------	----------	-------

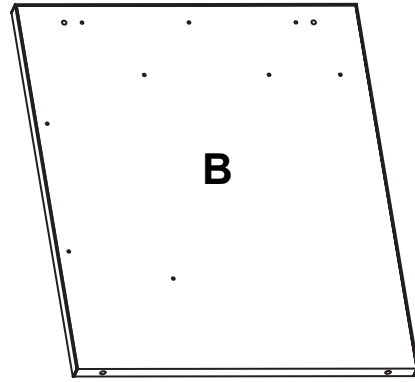

Right Side	05840741	1 ea.
------------	----------	-------

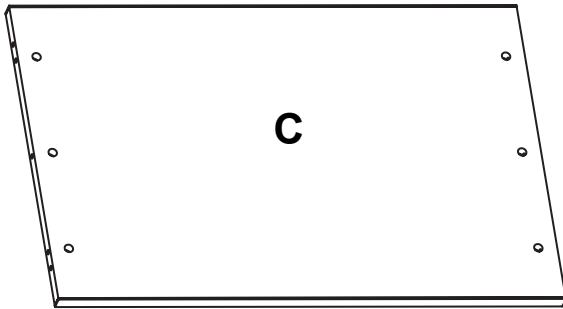


Worksurface	05840701	1 ea.
-------------	----------	-------

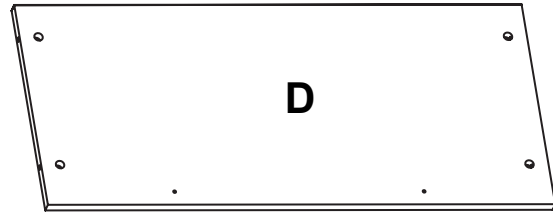

Back	05840752	1 ea.
------	----------	-------



Storage Shelf	05840737	1 ea.
---------------	----------	-------

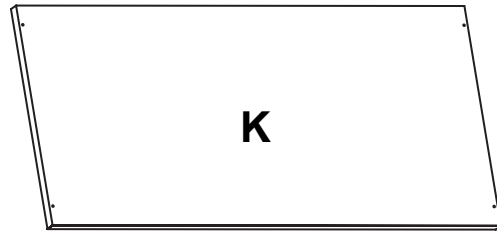

Keyboard Shelf	05840728	1 ea.
----------------	----------	-------

## HARDWARE



H1	Varianta screws	988060	6 ea.
----	-----------------	--------	-------



H2	Minifix Bolt	909834	12 ea.
----	--------------	--------	--------




H3	Wood Dowel	195000	4 ea.
----	------------	--------	-------



H4	Minifix Cam	909810	12 ea.
----	-------------	--------	--------




H5	Confirmat Screws	950100	2 ea.
----	------------------	--------	-------



H6	Caster Bracket	402302	4 ea.
----	----------------	--------	-------




H7	Caster Socket	402301	4 ea.
----	---------------	--------	-------



H8	Casters-Locking	402290	4 ea.
----	-----------------	--------	-------




H9	Panhead Screw 6 x.625"	901216	4 ea.
----	---------------------------	--------	-------

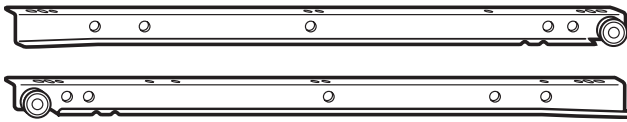

S3

S4

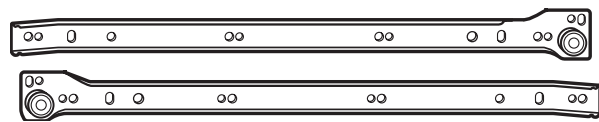

S2

S1



16" Shelf Slide (left & right)	490260	1 pr.
-----------------------------------	--------	-------

16" Side Channel (left & right)	490260	1 pr.
------------------------------------	--------	-------

### Using the Minifix System:


Insert the Minifix Cams into the appropriate holes with the arrow facing outwards as shown.

When screwing post into hole, **Do Not** over tighten. Screw post down until bottom face of post flange just touches board surface.

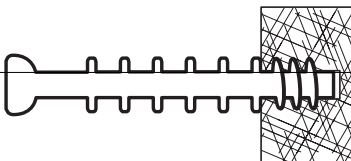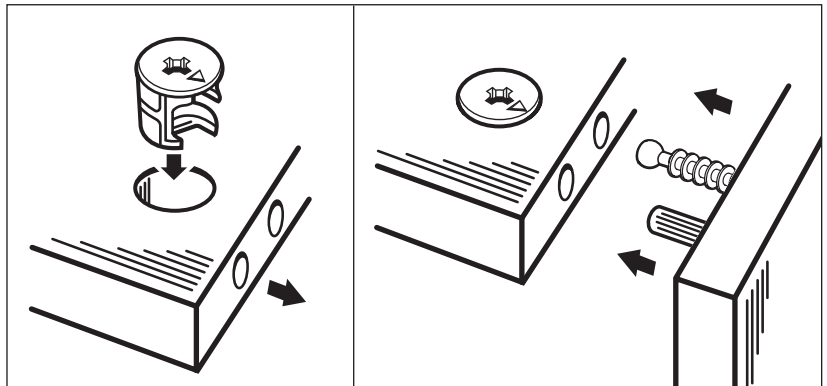


Using the #2 Phillips screwdriver, rotate the Cam Devices a half turn clockwise until snug.

To disassemble, turn the Cam Devices counter-clockwise and remove panels.

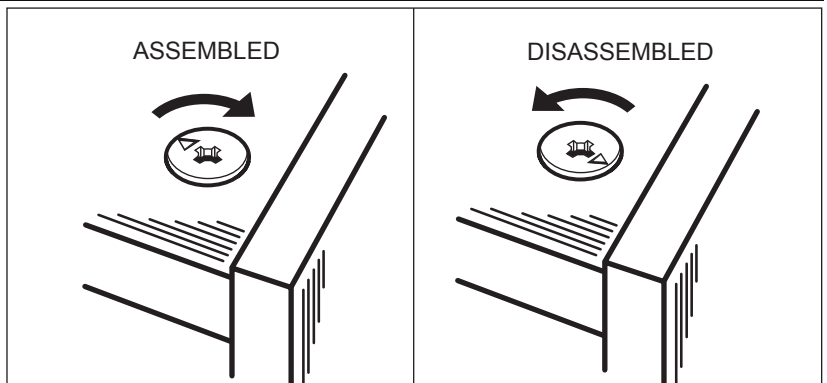


**#1**

Attach a left Side Channel (S1) to Left Side (A) using Varianta Screws (H1) in the selected pre-drilled holes as shown.

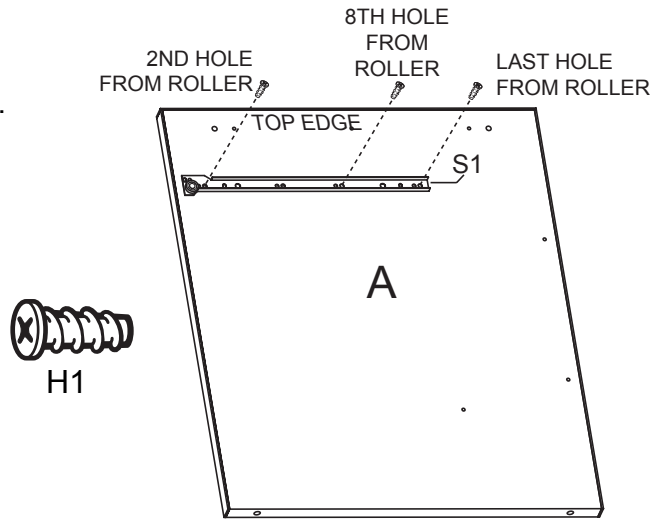

**#2**


Attach a right Side Channel (S2) to Right Side (B) using Varianta Screws in the selected pre-drilled holes as shown.

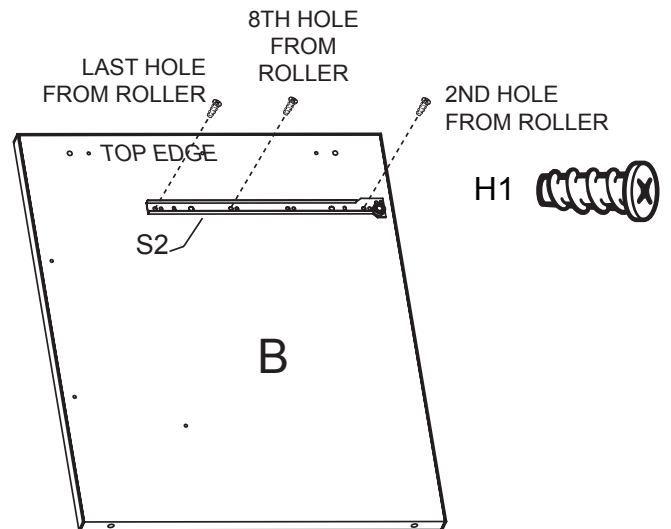

**#3**

Place the Left Side (A) on a clean, carpeted surface as shown. Screw six Minifix Bolts (H2) into the Left Side (A) where indicated.


Insert two Wood Dowels (H3) into the Left Side (A) where indicated.

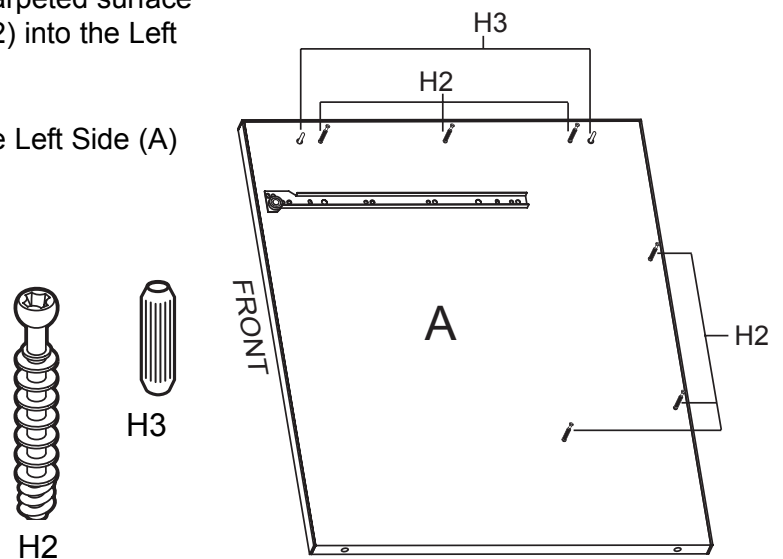

**#4**


Place the Right Side (B) as shown. Screw six Minifix Bolts (H2) into the Right Side (B) where indicated.

Insert two Wood Dowels (H3) into the Right Side (B) where indicated.

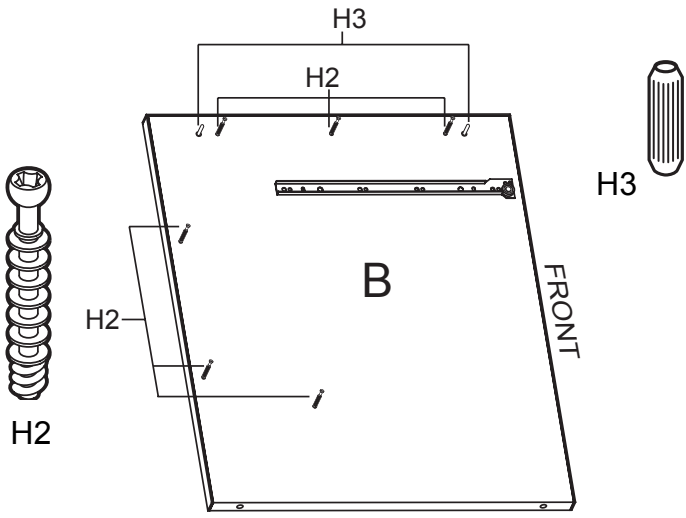


**#5**

Place the Worksurface (C) as shown. Insert six Minifix Cams (H4) into the Worksurface where indicated with the arrows of the cams facing out.

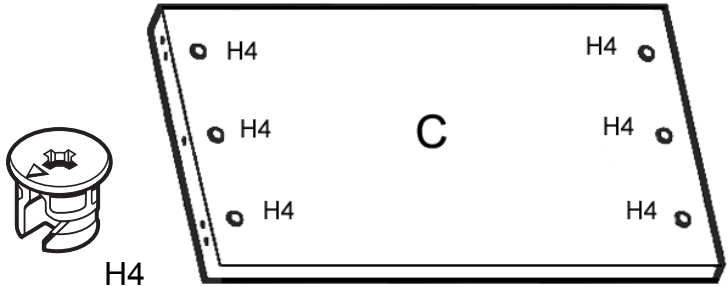

**#6**


Place the Back Panel (D) and Storage Shelf (G) as shown. Insert Minifix Cams (H4) into the Back Panel and the Storage Shelf where indicated with the arrows of the cams facing out.

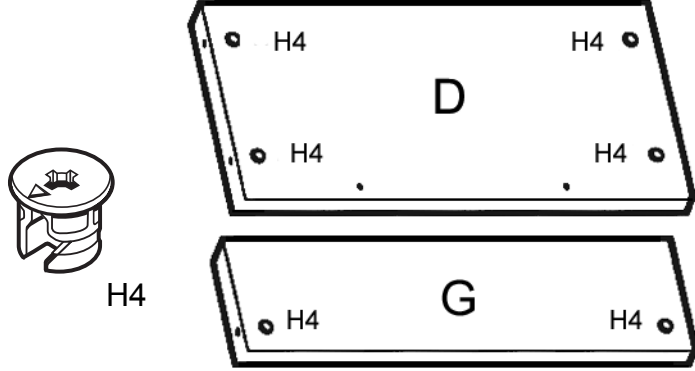

**#7**

Place the Left Side (A) as shown. Position the Back Panel (D) onto the corresponding bolts of the Left Side as shown.


Rotate the arrows of the Minifix Cams (H4) in the Back Panel clockwise to secure in place.

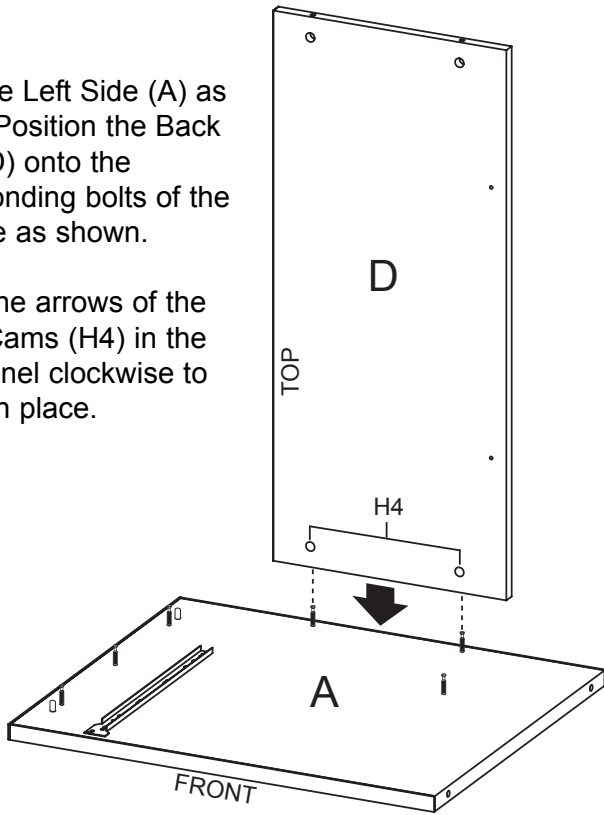

**#8**


Position the Storage Shelf (G) onto the Left Side (A) as shown. Rotate the arrows of the Minifix Cam (H4) in the Storage Shelf clockwise to secure in place.

Secure the Storage Shelf to the Back Panel (D) using two Confirmat Screws (H3) through the pre-drilled holes as shown.

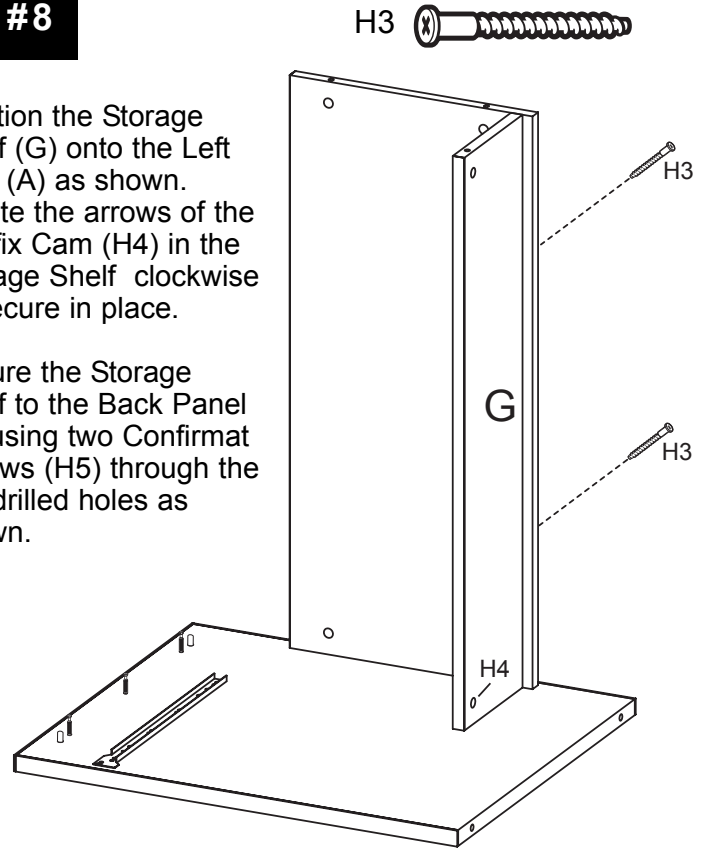


**#9**

Position the Worksurface (C) onto the Left Side (A) as shown. Rotate the arrows of the Minifix Cams (H4) in the Worksurface (C) clockwise to secure in place.

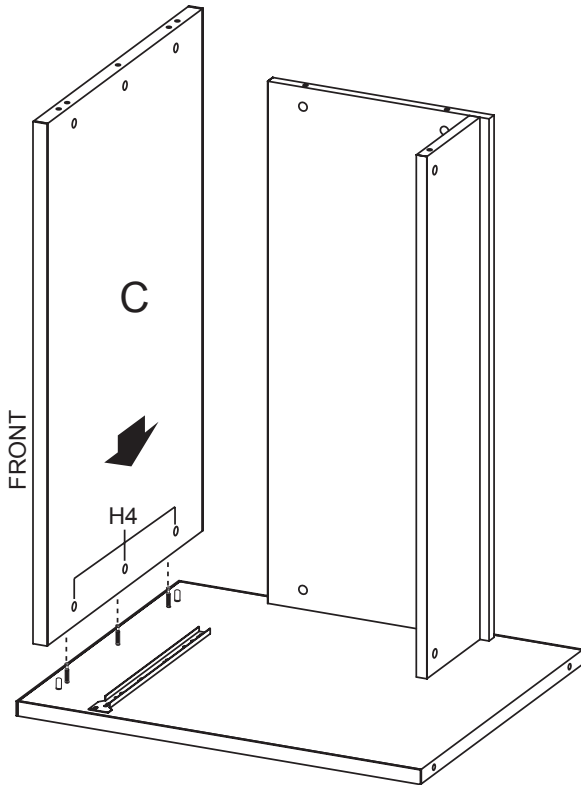

**#10**

Position the Right Side (B) onto the unit as shown. Rotate the arrows of the cams in the Worksurface (C), Back Panel (D) and Storage Shelf (G) to secure in place.

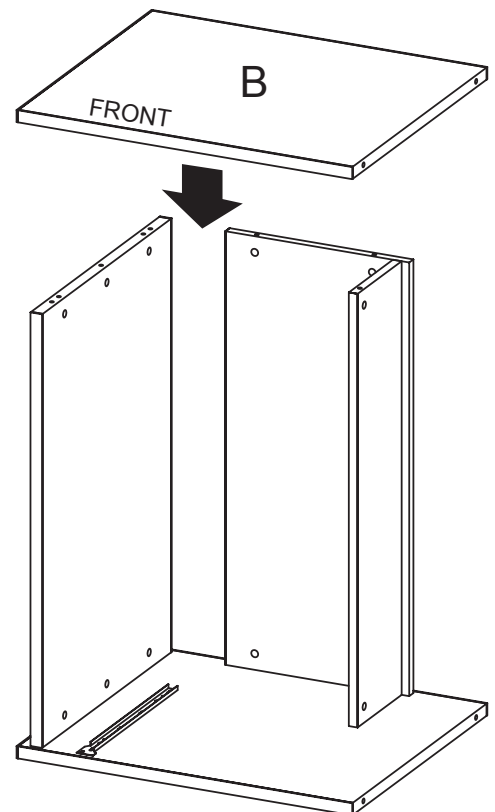


## #11

Position the Caster Brackets (H6) over the corresponding holes in the bottom edges of the Sides (A & B). Insert Caster Sockets (H7) into the holes and tap until bottomed out against the Caster Brackets.


Insert the Casters (H8) into the Caster Sockets and tap into place.

With the assistance of another person, turn the unit upright.

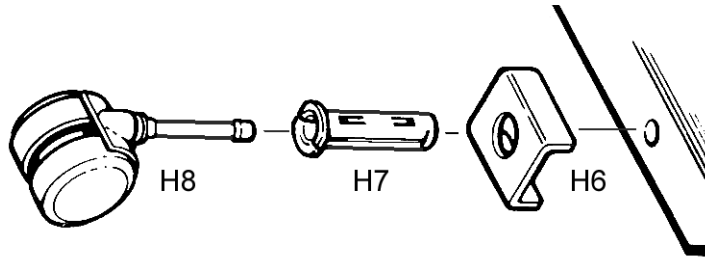


## #12

Place the Keyboard Shelf (K) with the pre-drilled holes facing up as shown. Attach the right and left Shelf Slides (S3 & S4) to the Keyboard Shelf using the #6x5/8" Panhead Screws (H9) as shown.

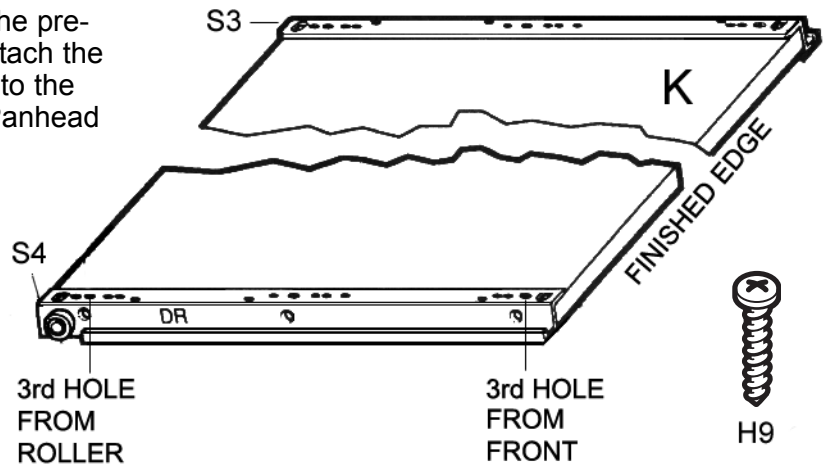

## #13

Slide the Keyboard Shelf (K) into the unit as shown.

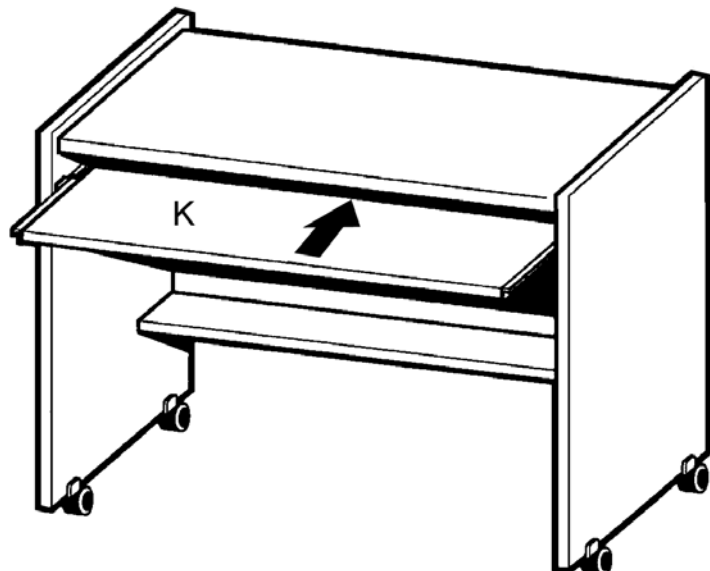

**Your HUB computer workstation is now fully assembled and ready for use.**