



No.:

Date: 27-DEC-2012

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Catalog Number : 02009ES3EOW326T

List Price : \$4,872

Notes:

Performed by:

Checked:



No.:

Date: 27-DEC-2012

DATA SHEET

Three-phase induction motor - Squirrel cage rotor

Customer :
Product line : Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Frame : 326T
Output : 20 HP
Frequency : 60 Hz
Poles : 8
Full load speed : 850
Slip : 5.56 %
Voltage : 208-230/460 V
Rated current : 57.9-52.4/26.2 A
Locked rotor current : 362/181 A
Locked rotor current (I_L/I_n) : 6.9
No-load current : 23.5/11.8 A
Full load torque : 122 lb.ft
Locked rotor torque : 300 %
Breakdown torque : 0 %
Design : D
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 25 s (hot)
Service factor : 1.15
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000
Degree of Protection : IP55
Approximate weight : 570 lb
Moment of inertia : 11.919 sq.ft.lb
Noise level : 56 dB(A)

	D.E.	N.D.E.	Load	Power factor	Efficiency (%)
Bearings	6312 C3	6212 C3	100%	0.84	85.5
Regreasing interval	20000 h	20000 h	75%	0.80	86.5
Grease amount	21 g	13 g	50%	0.70	85.5

Notes:

Performed by

Checked




No.:

Date: 27-DEC-2012

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

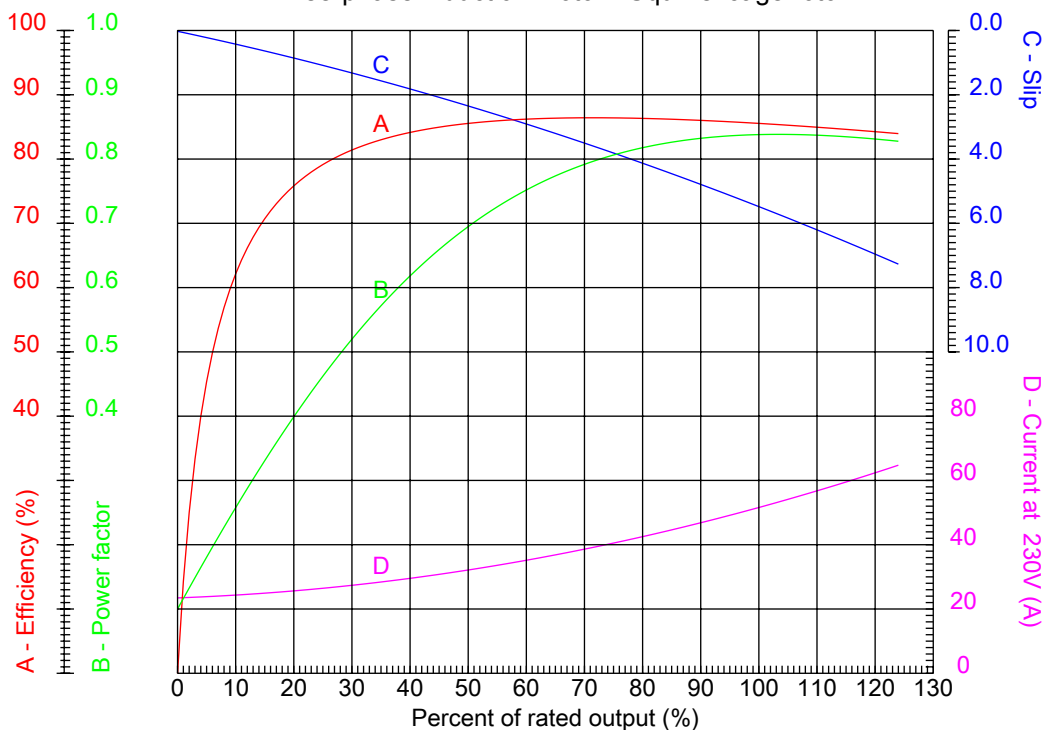

Customer :
Product line : Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Frame	: 326T	Locked rotor current (I _l /I _n)	: 6.9
Output	: 20 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 850	Design	: D
Voltage	: 208-230/460 V	Locked rotor torque	: 300 %
Rated current	: 57.9-52.4/26.2 A	Breakdown torque	: 0 %
Insulation class	: F		

Notes:

Performed by


Checked



No.:

Date: 27-DEC-2012

CHARACTERISTIC CURVES RELATED TO SPEED Three-phase induction motor - Squirrel cage rotor

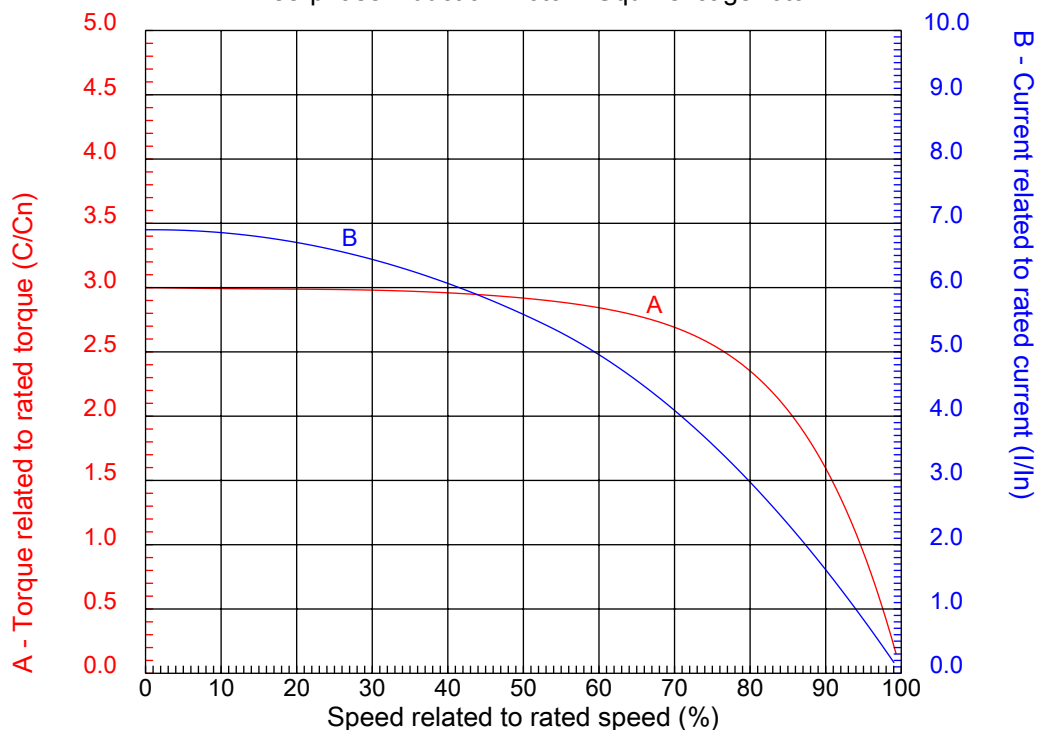


Customer :
Product line : Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Frame	: 326T	Locked rotor current (I _l /I _n)	: 6.9
Output	: 20 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 850	Design	: D
Voltage	: 208-230/460 V	Locked rotor torque	: 300 %
Rated current	: 57.9-52.4/26.2 A	Breakdown torque	: 0 %
Insulation class	: F		

Notes:

Performed by

Checked

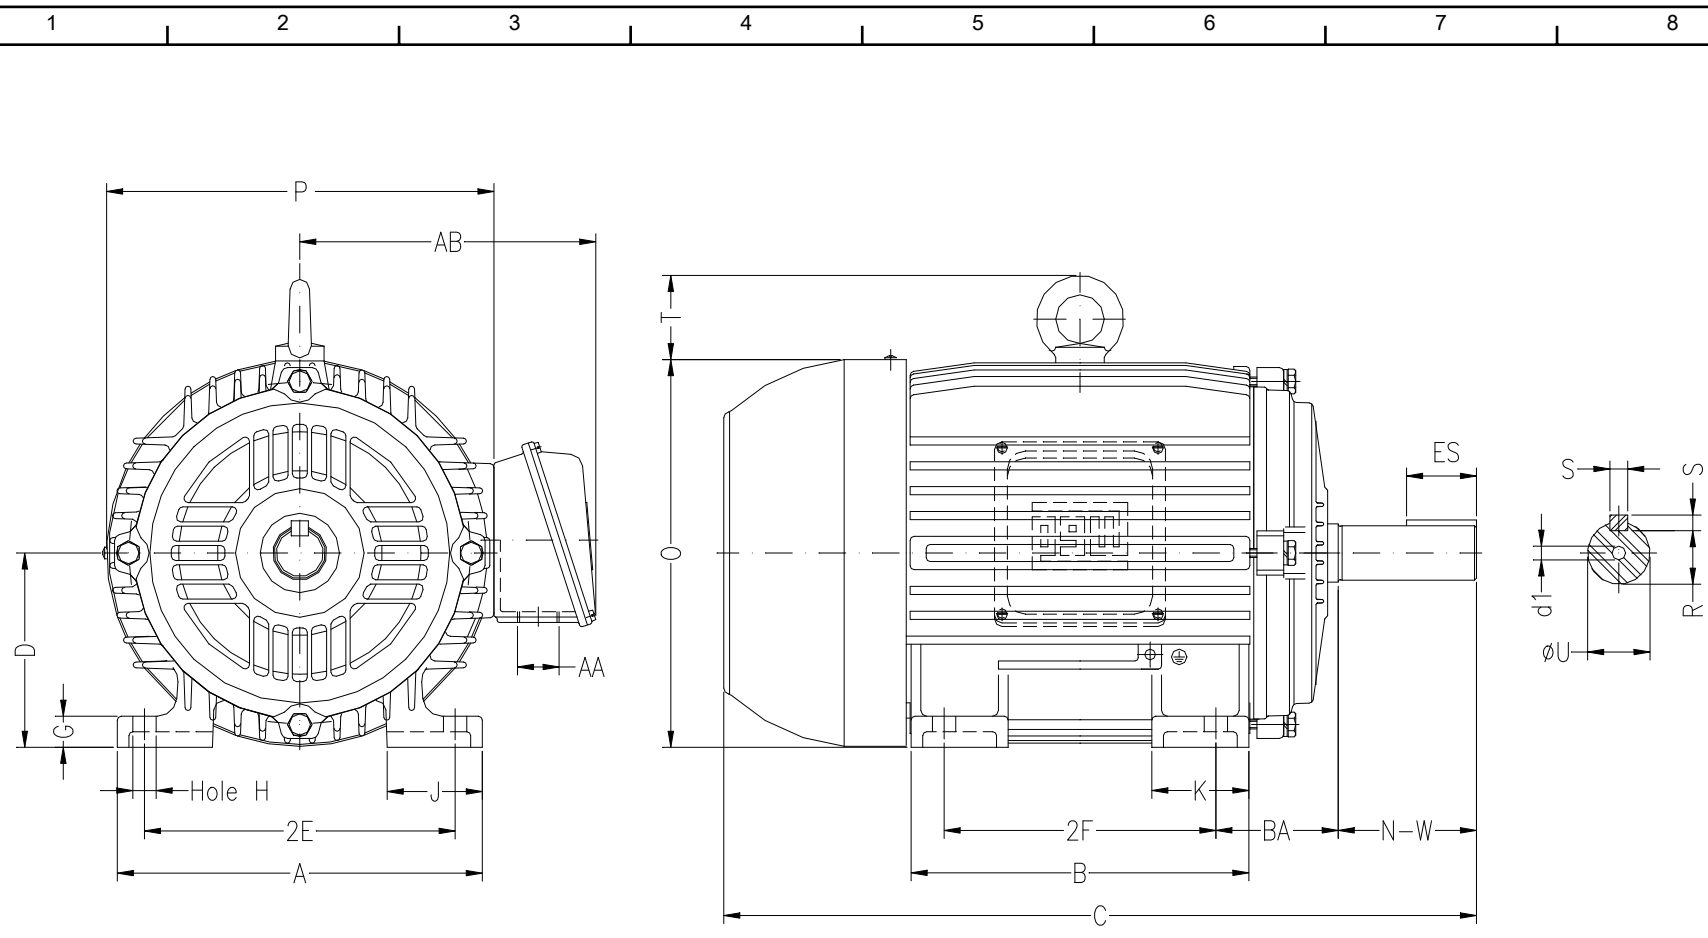

Notes:

2E 12.500	A 15.157	2F 12.000	B 14.567	BA 5.250
J 3.228	K 3.346	P 15.591	ES 3.937	depth 0.500
S 0.500	N-W 5.250	U 2.125	R 1.844	AB 11.496
D 8.000	G 1.307	O 15.953	T 2.441	HD 18.394
H 0.657	C 31.116	AA NPT 2"	d1 A 4	d2 A 4
Flange FD-406	AJ 16.000	AK 14.000	BD 18.000	BF 0.828
BB 0.203				

Performed by:

Checked:

Customer:

Oil Well Pumping : High Slip - NEMA Design "D" - TEFC (IP55)

Three-phase induction motor
Frame 326T - IP55

27-DEC-2012

