



No.:

Date: 24-DEC-2012

Customer :

TECHNICAL PROPOSAL

Three-phase induction motor - Squirrel cage rotor

Product line : Three-Phase : IEC Tru-Metric - TEFC (IP55) - Aluminum Frame

Catalog Number : .2518EP3EAL71

List Price : \$282

Notes:

Performed by:

Checked:



No.:

Date: 24-DEC-2012

DATA SHEET

Three-phase induction motor - Squirrel cage rotor

Customer :
 Product line : Three-Phase : IEC Tru-Metric - TEFC (IP55) - Aluminum Frame

Frame : 71
 Output : 0.33 HP
 Frequency : 60 Hz
 Poles : 4
 Full load speed : 1710
 Slip : 5.00 %
 Voltage : 230/460 V
 Rated current : 1.36/0.682 A
 Locked rotor current : 7.50/3.75 A
 Locked rotor current (I_L/I_n) : 5.5
 No-load current : 1.00/0.500 A
 Full load torque : 1.000 lb.ft
 Locked rotor torque : 270 %
 Breakdown torque : 290 %
 Design : N
 Insulation class : F
 Temperature rise : 80 K
 Locked rotor time : 32 s (hot)
 Service factor : 1.15
 Duty cycle : S1
 Ambient temperature : -20°C - +40°C
 Altitude : 1000
 Degree of Protection : IP55
 Approximate weight : 20 lb
 Moment of inertia : 0.01875 sq.ft.lb
 Noise level : 47 dB(A)

	D.E.	N.D.E.	Load	Power factor	Efficiency (%)
Bearings	6203 ZZ	6202 ZZ	100%	0.63	73.0
Regreasing interval	---	---	75%	0.54	71.0
Grease amount	---	---	50%	0.42	66.0

Notes:

Performed by

Checked




No.:

Date: 24-DEC-2012

PERFORMANCE CURVES RELATED TO RATED OUTPUT

Three-phase induction motor - Squirrel cage rotor

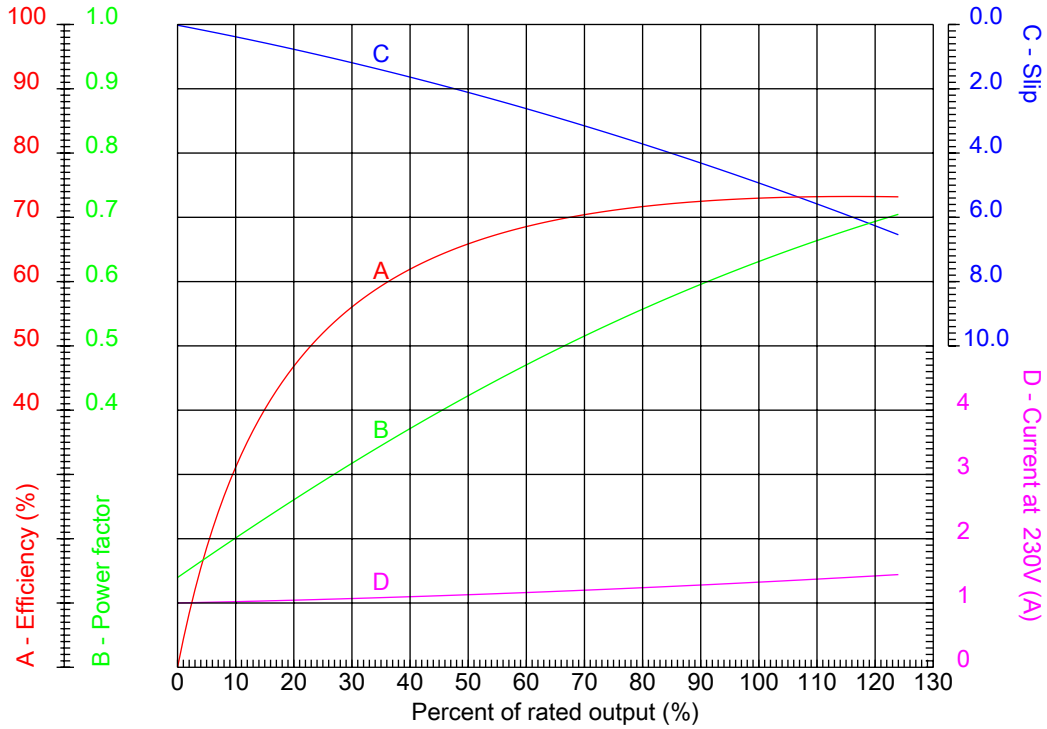

Customer :
 Product line : Three-Phase : IEC Tru-Metric - TEFC (IP55) - Aluminum Frame

Frame	: 71	Locked rotor current (I _l /I _n)	: 5.5
Output	: 0.33 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1710	Design	: N
Voltage	: 230/460 V	Locked rotor torque	: 270 %
Rated current	: 1.36/0.682 A	Breakdown torque	: 290 %
Insulation class	: F		

Notes:

Performed by

Checked




No.:

Date: 24-DEC-2012

CHARACTERISTIC CURVES RELATED TO SPEED

Three-phase induction motor - Squirrel cage rotor

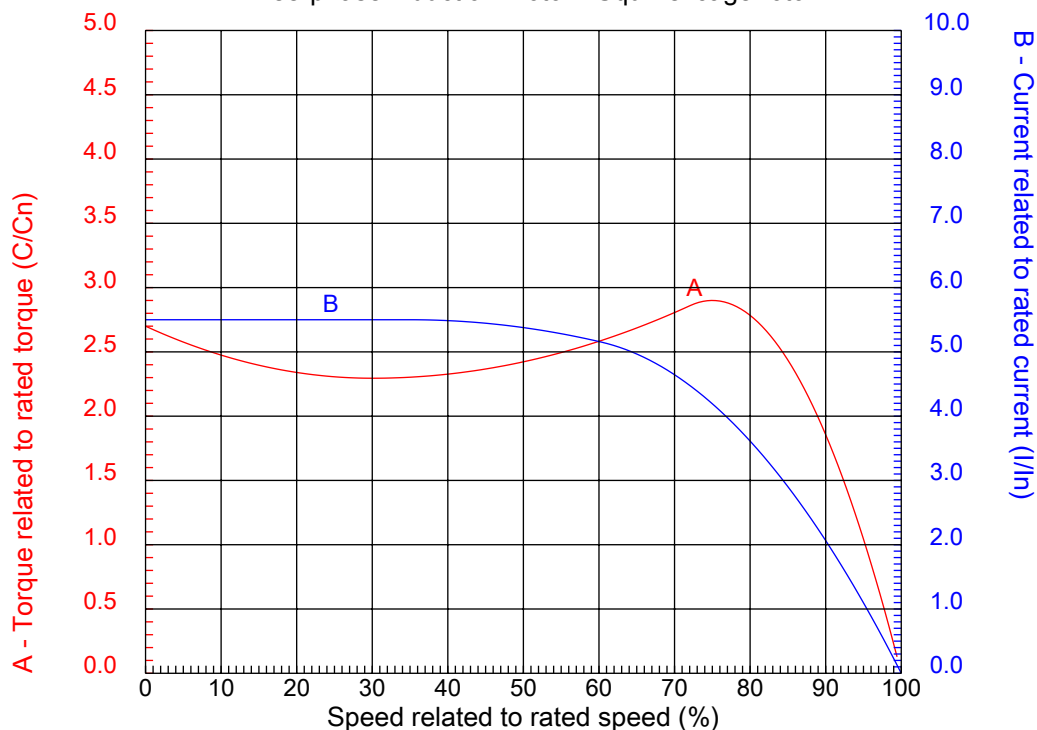


Customer :
Product line : Three-Phase : IEC Tru-Metric - TEFC (IP55) - Aluminum Frame


Frame	: 71	Locked rotor current (I _l /I _n)	: 5.5
Output	: 0.33 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1710	Design	: N
Voltage	: 230/460 V	Locked rotor torque	: 270 %
Rated current	: 1.36/0.682 A	Breakdown torque	: 290 %
Insulation class	: F		

Notes:

Performed by

Checked

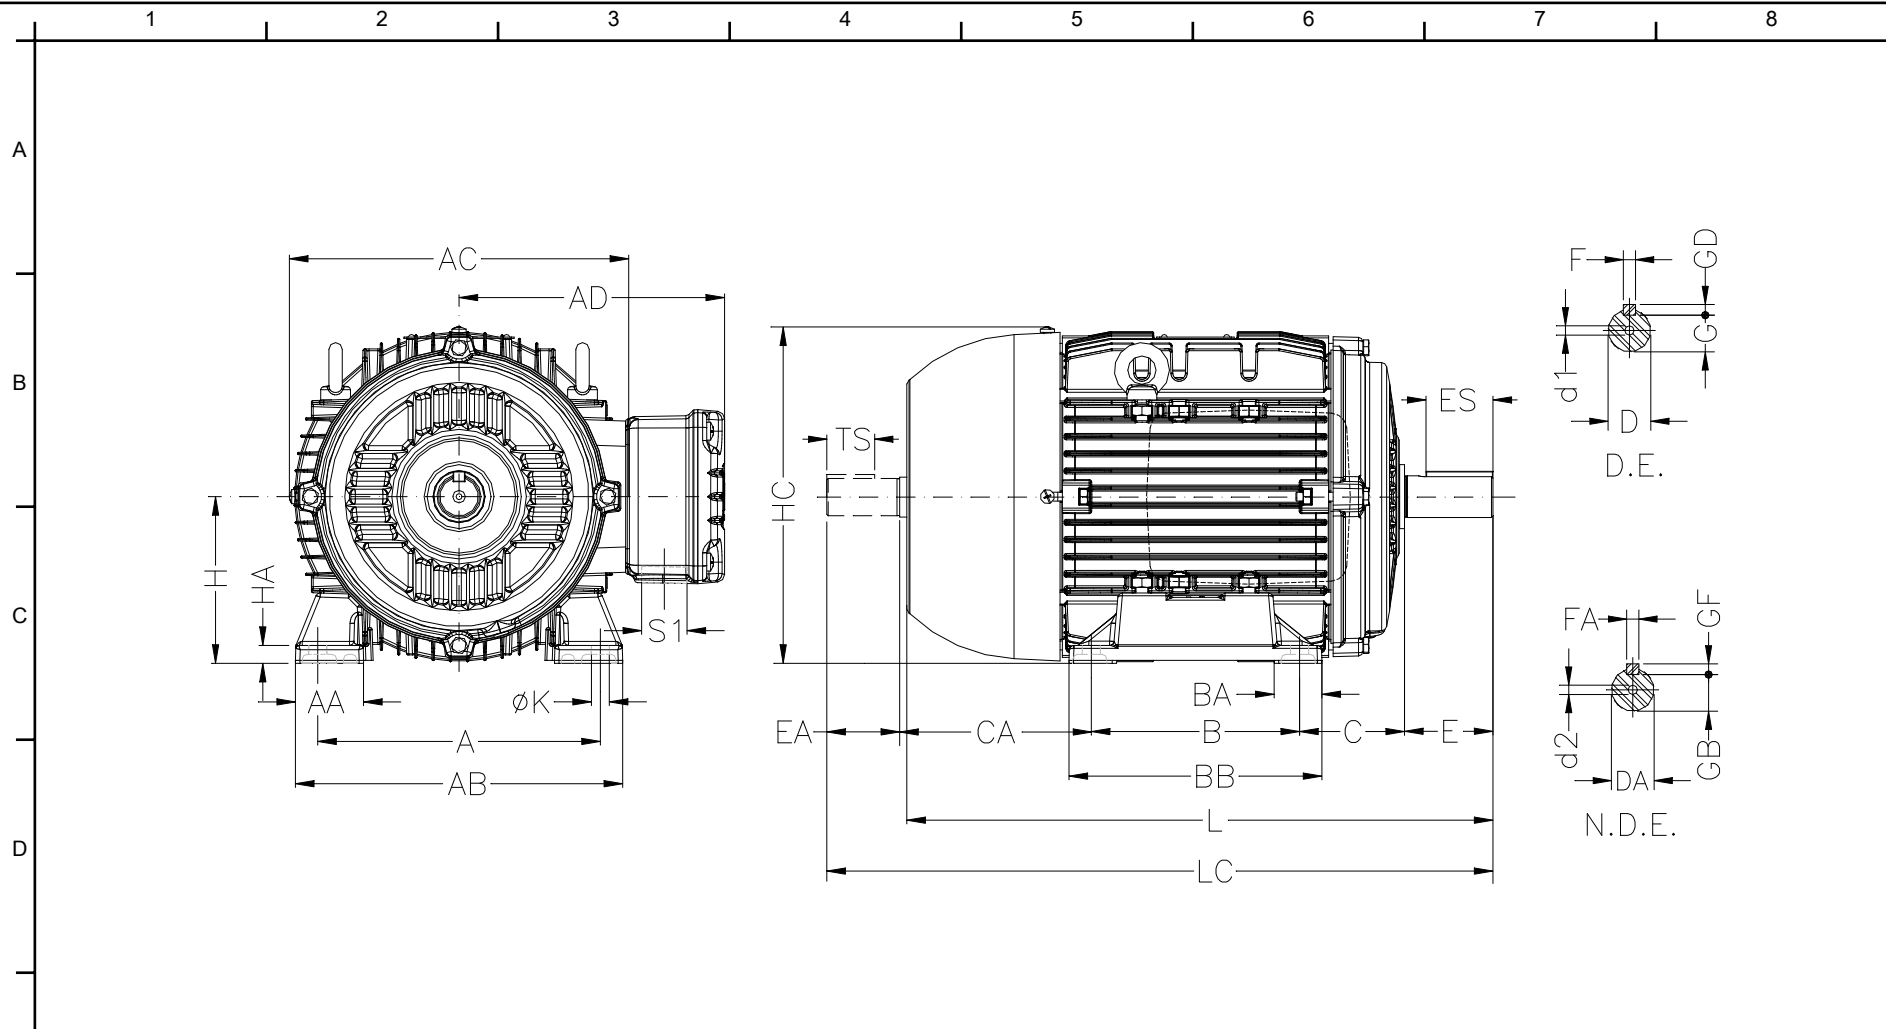

E	A	AA	AB	AC	AD	Notes:
	112	28	134	140	127	
F	B	BA	BB	C	CA	Performed by:
	90	24.5	108	45	88	
F	D	E	ES	F	G	Checked:
	14j6	30	18	5	11	
F	GD	DA	EA	TS	FA	Customer:
	5	11j6	23	14	4	
F	GB	GF	H	HA	HC	Three-Phase : IEC Tru-Metric - TEFC (IP55) - Aluminum Frame
	8.5	4	71	6	139	
F	HD	K	L	LC	S1	Three-phase induction motor
	192	7	248	276	NPT 3/4"	
F	d1	d2	Flange	LA	M	Frame 71 - IP55
	DM5	EM4	FF-130	9	130	
F	N	P	T	S	Angle	24-DEC-2012
	110	160	3.5	10	45°	
F	Holes					
	4					