

SPEAKMAN®

SEF-1800-CA-TW

DESCRIPTION EYESAVER® FAUCET SPECIFICATIONS

The SEF-1800-CA Eyesaver® faucet combines a gooseneck faucet with an independently operated eyewash. The faucet features ¼ turn Speakman ceramic valves while the eyewash offers twin aerated sprays and flip-top dust covers. Includes thermostatic mixing valve.

Lead free brass construction.

SPECIFICATIONS


EYEWASH

Activator: Pull handle with graphics

Spray heads: (2) aerated yellow plastic spray outlets with flip-top dust caps

Performance: 2.6 gpm @ 30 psi

Compliance: ANSI Z358.1

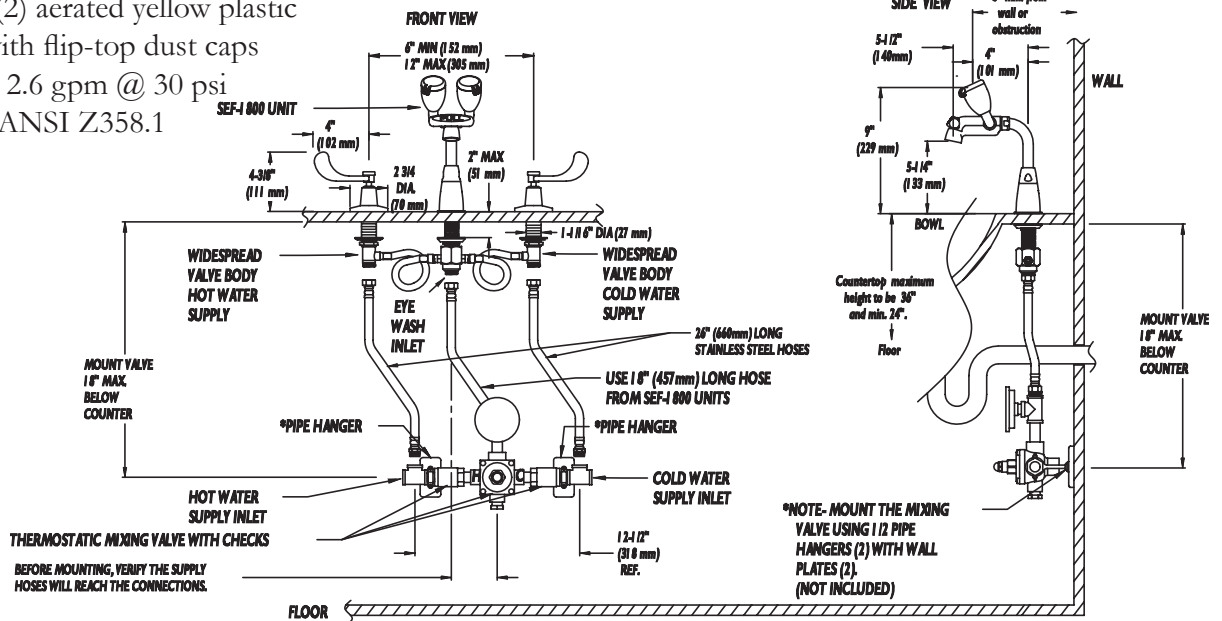

FAUCET

Supply: ½" male connections for hot and cold inlets

Widespread Valves: ¼ turn ceramic cartridges covered by a 25-year warranty

Center Distance: Adjustable center of 6" to 12"

Activator: Vandal resistant 4" wrist blades handles with color-coded indexes or single handle lever

Performance: 2.2 gpm

Counter thickness: Up to 2" thick

Compliance: ASME A112.18.1, CSA B125 and CA AB1953

Universal Emergency Sign Included

OPTIONS

- BO Vandal resistant 0.5 gpm flow control
- LF Laminar flow outlet 2.2 gpm
- ST* Serrated tip with vacuum breaker
- 6WH 6" wrist handles
- 8 8" gooseneck spout
- NA Non aerated eyewash

TMV

Model: Speakman SE-370

Finish: Rough bronze

Thermometer: Dial thermometer (0-200°F)

Check Valves: Integral to unit

Temperature Control: Liquid filled thermostatic motor with stainless steel sliding piston control device, reverse seat closure and both fixed and variable cold water bypass.

Min. Supply Pressure: 40 PSI

Max. Inlet Pressure: 125 PSI (recommended 65 PSI)

Max Inlet Temperature: 108°F (recommended 120°F-140°F)

Max. Output Flow: 7 gpm (5 gpm bypass flow)

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____