

Catalog Number	
Notes	Type

FEATURES & SPECIFICATIONS

INTENDED USE

For use with housings L7X, L7XR, LC6, LCP, L7XP, L7XPR, L7XF and L7XFR.

CONSTRUCTION

Aluminum one piece reflector.

Polyester powder coat paint.

Baffles available in black or white.

White and black finish have integral flange.

INSTALLATION

Socket to trim interface.

Trim retention is achieved by utilizing two side-mounted torsion springs on the trim and two receiving brackets in the can, ensuring a consistently tight fit with the ceiling.


LISTING

U.L. Listed to U.S. and Canadian safety standards.

Damp location listed.

6" Full Reflector Trim

7B1

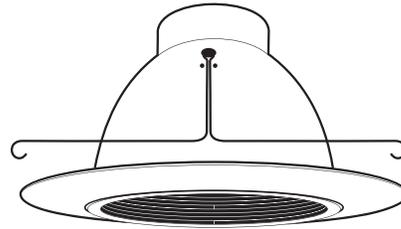


BAFFLE SHALLOW
Wide Flange

Specifications

Height: 5-3/4 (14.6)

Lamp opening: 4-1/4 (10.8)

Diameter: 7-5/8 (19.4)




All dimensions are inches (centimeters).

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: **7B1 TOR**

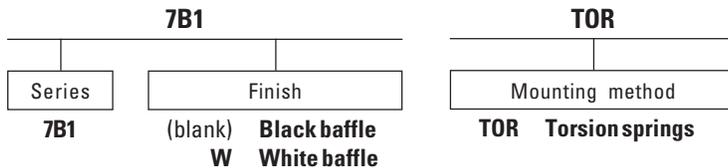

Housing Compatibility

Housing and trim ordered separately.

Application	Source	Maximum wattage	Housing
IC	Incandescent	75 PAR30	L7X, L7XR, L7XPR, LC6, LCP
		65 BR30	L7X, L7XR, L7XPR, LC6, LCP
	Fluorescent	13DTT	L7XF, L7XFR
		18TRT	L7XF, L7XFR

7B1 6" Baffle Shallow Full Reflector Trim



Sheet #: 7B1-TOR

©2010 Acuity Brands Lighting, Inc. All rights reserved. 3/4/10

Lithonia Lighting
Recessed Downlighting
One Lithonia Way, Conyers, GA 30012
Phone: 800-315-4935 Fax: 770-918-1209
www.lithonia.com