CUT PROTECTION > Precision work

Krynit Grip and Proof 599


DESCRIPTION AND GENERAL PROPERTIES

- Material Nitrile GRIP&PROOF coating
- Length (inches) 90.5-11.02
- Wrist Knitted wrist
- Colour/Color Black
- Interior finish Seamless textile support from HDPE fibres
- Exterior finish Ventilated back
- Size / EAN 7 8 9 10 11
- Packaging 1 pair/bag 12 pairs/bag 48 pairs/carton
- Complementary information Guaranteed DMF free Guaranteed Silicone free on palm and fingers




PERFORMANCE RESULTS

Certification category 2



ISO 13997 defines the weight on the blade required to cut in a single movement.

Data was obtained according to ISO 13997, from the average of several measurements. As Individual specimens will obviously have greater or lesser cut resistance than the average, so this result can provide only a general indication of the cut resistance of any protective material.

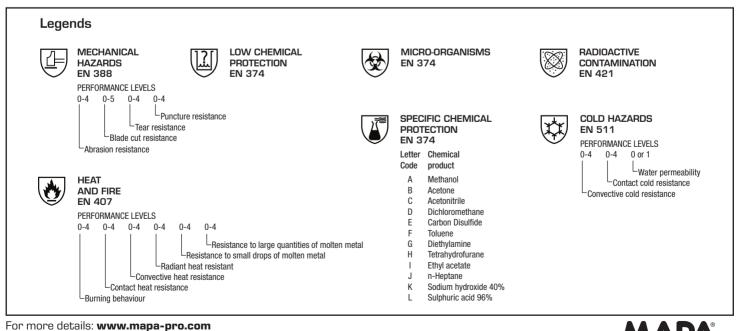



Krynit Grip and Proof 599

DESCRIPTION AND GENERAL PROPERTIES

- Cut and oilproof up to knuckle, repeals oil penetration, reduce dermatitis while ensuring cut protection
- Grip and Proof coating ensures an excellent grip in oily environments. It also reduces muscle fatigue and boosts your productivity
- Excellent abrasion resistance due to nitrile coating
- Long lasting and cost effective: washable until 5 cleaning cycles (see laundering and drying conditions). Reducing your replacement costs.

MAIN FIELDS OF USE

Automotive/mechanical industry

- Screwing and bolting
- Machining parts using cutting oil
- Handling untrimmed parts or sheet metal
- Handling sheet metal
- Handling oily mechanical parts
- Handling and sorting small, sharp parts
- Engine part assembly

Mechanical industry

- Maintenance in wet environments (water, oil, greases, hydrocarbons)
- Cutting and stamping metal
- INSTRUCTIONS FOR USE

Instructions for use

It is recommended tocheck that the gloves are suitable for the intended use, because the conditions of use at workplace may differ from the «CE»-type tests.

•It is not recommended for persons sensitized to dithiocarbamates and to natural latex (wrist with elastic natural rubber).

•Put the gloves on dry, clean hands.

•Ensure the inside of the gloves is dry beforeputting them on again.

·Inspect the gloves for cracks or snags beforereusing them.

•Nor to use them next to moving machinery

Storage conditions

Store the glove in their original packaging protected from heat, lightand humidity

Laundering conditions

Wipe gloves contaminated with oil or grease with a drycloth before removing them. Performances of the gloves are not negatively affected by cleaning up to 5 cleaning cycles* under the conditions described above: Use of a household or industrial washing machine and a standard liquid detergent, synthetic program temperature 60 ° Cand spin drying at 400 rotations per minute. Improper use of the gloves or submitting them to a cleaning or laundering process that is not specifically recommended can alter their performance levels. The customer or the launderer is sole responsible for the compliance with the washing conditions.

* Test performed: 5 successive washes on unworn gloves.

Drying conditions

Tumble drying at 60°C maximum. Ensure the inside of the gloves is dry before putting them on again.

LEGISLATION

This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council. This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).

• CE-Type Examination Certificate

0075/014/162/09/13/1082 ext 01/06/14

Issued by the notified body nr

0075 - C.T.C - 4 rue Hermann Frenkel - 69367LYON Cedex 07 France

