



No.:

Date: 26-DEC-2012

Customer :

TECHNICAL PROPOSAL

Single-phase induction motor - Squirrel cage rotor

Product line : Close Coupled Pump : Single-Phase - "JM" Type - TEFC - Standard Efficiency

Catalog Number : 00158ES1E145JM

List Price : \$754

Notes:

Performed by:

Checked:



No.:

Date: 26-DEC-2012

DATA SHEET

Single-phase induction motor - Squirrel cage rotor

Customer :
Product line : Close Coupled Pump : Single-Phase - "JM" Type - TEFC - Standard Efficiency

Frame : 145JM
Output : 1.5 HP
Frequency : 60 Hz
Poles : 4
Full load speed : 1760
Slip : 2.22 %
Voltage : 208-230/460 V
Rated current : 7.20/3.60 A
Locked rotor current : 59.8/29.9 A
Locked rotor current (I_L/I_n) : 8.3
No-load current : 4.00/2.00 A
Full load torque : 4.42 lb.ft
Locked rotor torque : 250 %
Breakdown torque : 290 %
Design : ---
Insulation class : F
Temperature rise : 80 K
Locked rotor time : 6 s (hot)
Service factor : 1.15
Duty cycle : S1
Ambient temperature : -20°C - +40°C
Altitude : 1000
Degree of Protection : IP55
Approximate weight : 51 lb
Moment of inertia : 0.15662 sq.ft.lb
Noise level : 55 dB(A)

	D.E.	N.D.E.	Load	Power factor	Efficiency (%)
Bearings	6206 ZZ	6203 ZZ	100%	0.89	77.0
Regreasing interval	---	---	75%	0.85	72.0
Grease amount	---	---	50%	0.78	66.0

Notes:

Performed by


Checked



No.:

Date: 26-DEC-2012

PERFORMANCE CURVES RELATED TO RATED OUTPUT Single-phase induction motor - Squirrel cage rotor

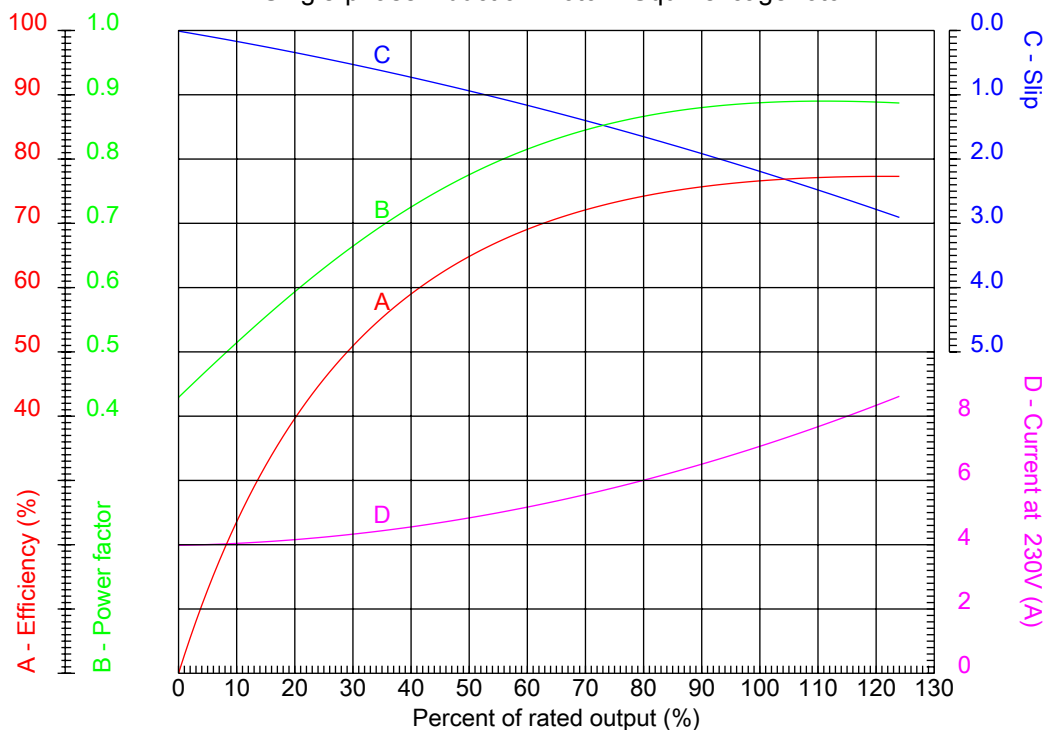


Customer :
Product line : Close Coupled Pump : Single-Phase - "JM" Type - TEFC - Standard Efficiency

Frame	: 145JM	Locked rotor current (I _l /I _n)	: 8.3
Output	: 1.5 HP	Duty cycle	: S1
Frequency	: 60 Hz	Service factor	: 1.15
Full load speed	: 1760	Design	: ---
Voltage	: 208-230/460 V	Locked rotor torque	: 250 %
Rated current	: 7.20/3.60 A	Breakdown torque	: 290 %
Insulation class	: F		

Notes:

Performed by

Checked

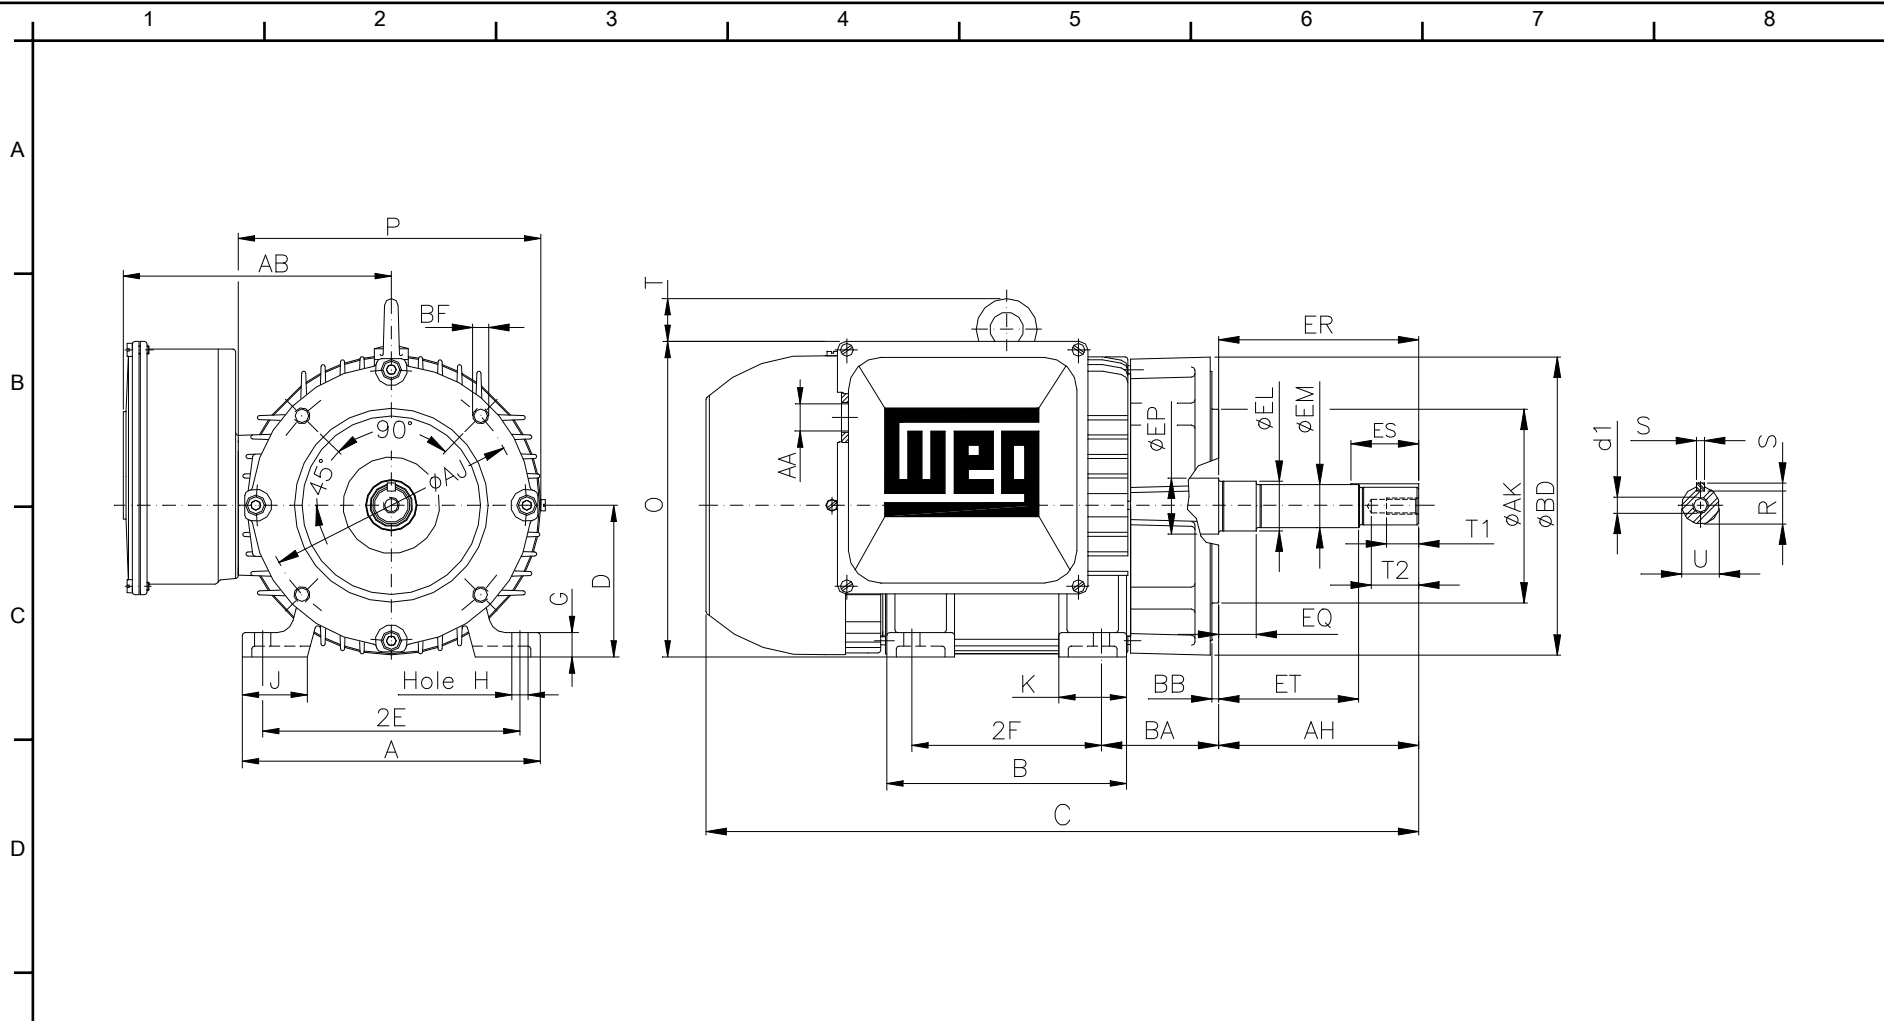

E	2E 5.500	2F 5.000	H 0.344	BA 2.560	A 6.457
	B 6.142	D 3.500	G 0.547	J 1.496	K 1.654
	O 7.000	P 7.047	AB 6.968	AA NPT 3/4	ER 4.258
	EQ 0.630	ET 2.880	U 0.874	EM 1.000	EL 1.156
	EP 1.179	S 0.187	R 0.767	ES 1.575	d1 EUNC 3/8-16
F	t1 0.748	t2 1.102	C 16.458	Flange FC-149	AJ 5.874
	AK 4.500	BD 6.496	BF UNC 3/8"x16	BB 0.157	BC
	AH				

Notes:

Performed by:

Checked:

Customer:

Close Coupled Pump : Single-Phase - "JM" Type - TEFC - Standard Efficiency

Single-phase induction motor
Frame 145JM - IP55

26-DEC-2012

