


## Tablet / Chromebook Charging Station

**NOTE:** Two people are required to attach this charging station to a wall.

**NOTE:** Hardware provided is intended for drywall installation only.


### PARTS LIST

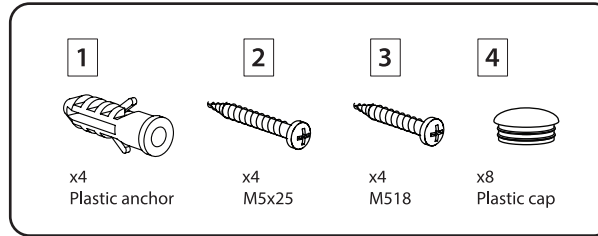

### TOOLS REQUIRED


Tape measure  
Level  
Drill  
1/4" drill bit (no stud)  
1/8" drill bit (stud)  
Extended drive phillips  
Stud finder  
Pencil

### SURFACE MOUNTING

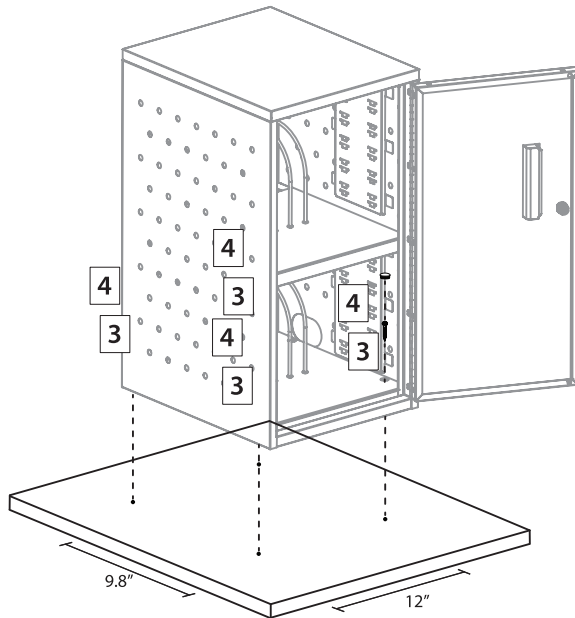

1. Place unit in the desired location.
2. Mark all four holes with a pencil.
3. Remove the unit and confirm holes are in the correct location.
4. Drill holes with the 1/8" drill bit and place four #3 screws partially into the holes (two-thirds).
5. Return the unit to the location and secure in place with four #3 screws, while the unit is on the surface.
6. Tighten all four #3 screws.
7. Cover #3 screws with #4 plastic caps from the inside of unit.

### WALL MOUNTING

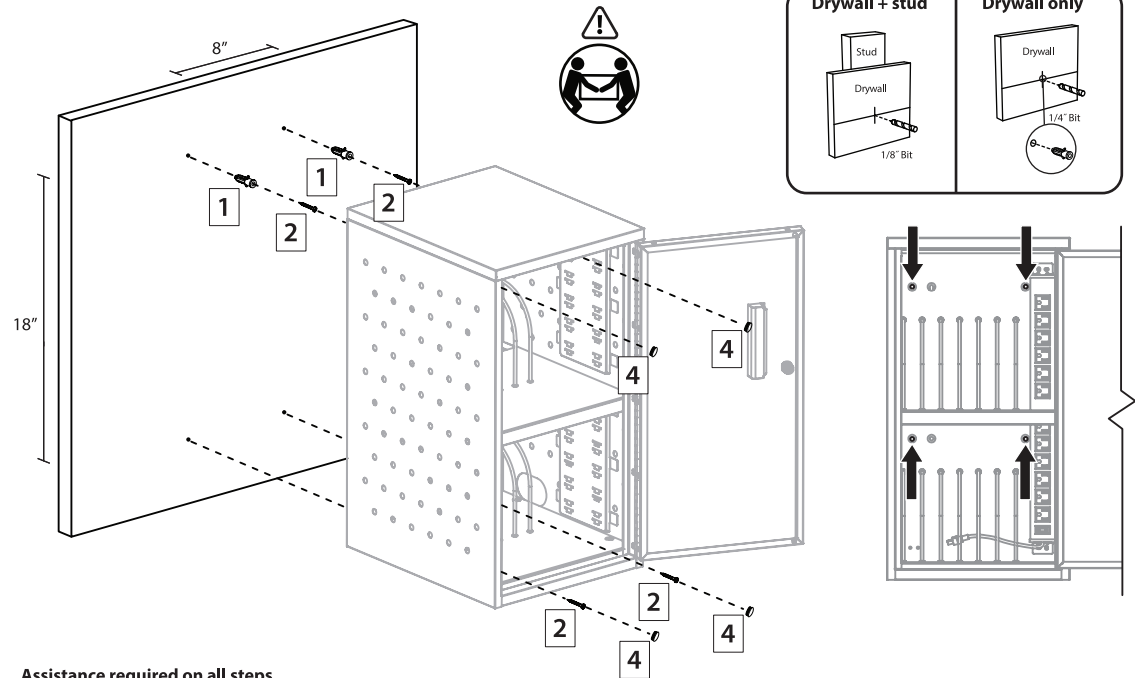

#### Assistance required on all steps

1. Place unit in the desired location.
2. Level the unit and hold in place.
3. Mark all four holes with a pencil (**see above for hole location**).
4. Remove the unit and confirm holes are in the correct location.
5. If mounting to a stud (**recommended**), drill holes with the 1/8" drill bit and place two #2 screws partially into top holes (two-thirds).
6. If mounting to drywall, drill holes with the 1/4" drill bit and place #1 anchors in the holes, followed by two #2 screws partially into top anchors (two-thirds).
7. Return the unit to the location and line-up top two #2 screws within keyholes.
8. Secure unit in place with two #2 screws on bottom, while unit is on the wall.
9. Tighten all four #2 screws.
10. Cover #2 screws with #4 plastic caps from the inside of unit.

# LUXOR


INNOVATIVE WORKSPACE PRODUCT SOLUTIONS

## Tablet / Chromebook Charging Station

**NOTE:** Two people are required to attach this charging station to a wall.

**NOTE:** Hardware provided is intended for drywall installation only.

### PARTS LIST

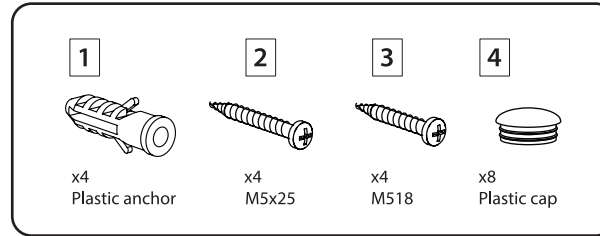

### TOOLS REQUIRED

Tape measure  
Level  
Drill  
1/4" drill bit (no stud)  
1/8" drill bit (stud)  
Extended drive phillips  
Stud finder  
Pencil

